

LARGE 240 (TwinSkin)

TECHNICAL DATA

Batch capacity

Tons wet rice 20.5 (34 m³)

AVERAGE DAILY OUTPUT* 24h in tons

Rice from 20% to 14% min. 30/ max. 40

The average daily out-put is largely depending of the kind of rice to be dried.

POWER REQUIRED

Model Pto drive - Tractor min. size of HP 80

or single electric drive motor 45 kW (60 HP)

Model electric drive - Mains supply line of kW 35

FAN

Design centrifugal

Revs/Min. 1.450

Air flow m³/h max 35.000

* The air flow volume refers to the fan as separate unit.

BURNER

Diesel, Automatic twin stage (Gas as option)

Caloric power Kcal/h max. 700.000

Centre Auger Ø 350 mm, capacity tons/h 65

Filling Auger Ø 250 mm, capacity tons/h 90


FUEL CONSUMPTION

Liters per ton of maize from 28% to 14% approx 5

Kcal per liter of water evaporated approx 900

N.B: All performance figures are largely depending of the ambient temperature, relative air humidity, maturity and cleanliness of crops to be dried



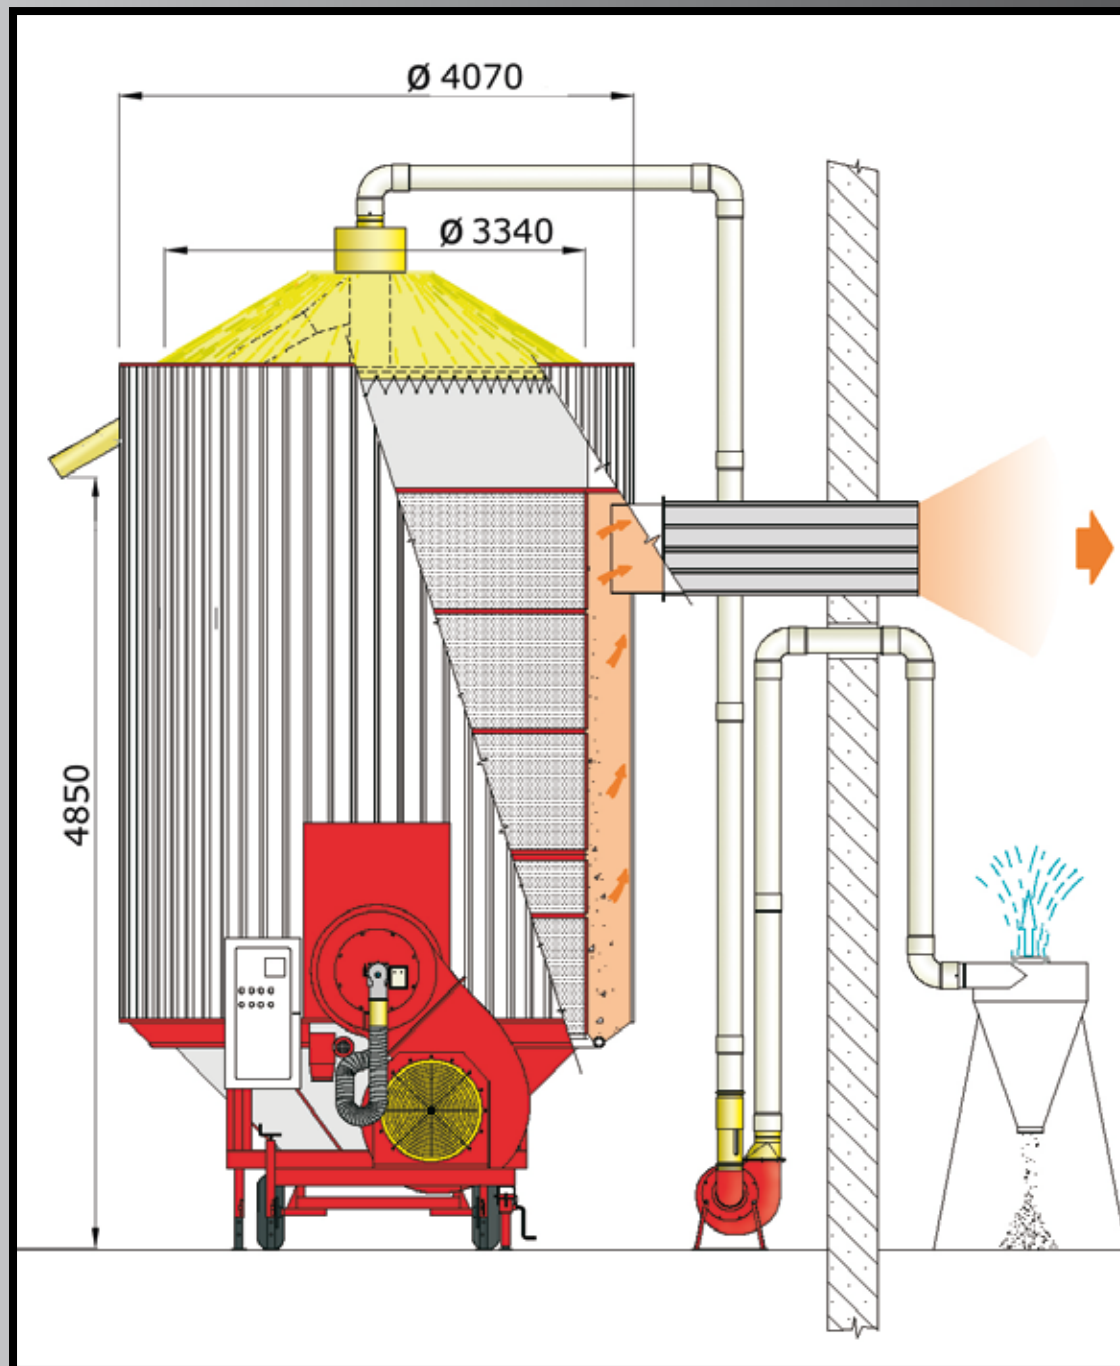

LARGE 240 (TwinSkin)